

# Dallas

## Standard features

- ✓ electronic controller
- ✓ digital temperature display
- ✓ base plus 5 shelves
- ✓ 3 position shelves
- ✓ epos ticket strips
- ✓ multiplexable
- ✓ 32mm mirrored or glazed endwalls
- ✓ low energy canopy lighting
- ✓ range of product temperatures
- ✓ low level electrical control box
- ✓ manual nightblinds

## Options

- ✓ electric nightblinds
- ✓ perspex case dividers
- ✓ perspex shelf risers
- ✓ multiplexing kit
- ✓ pin bar and hooks
- ✓ produce racks
- ✓ under shelf lighting
- ✓ low energy fans



# Dallas

low front remote multideck  
& low front slim line remote multideck  
M0 specification

**ECA**  
APPROVED



**BOND**  
DISPLAY CABINETS

designed and built in the UK  
as part of

*The*  
**BOND**  
*GROUP*



help reduce  
your carbon  
footprint  
buy British

**BOND**  
DISPLAY CABINETS

designed and built in the UK  
as part of


*The*  
**BOND**  
*GROUP*

# Dallas 70











Dallas 70 meets Class M0 specification (product at -1°C to +4°C) and is suitable for all products including fresh meat.

With its 700mm profile and 400mm shelves the dallas boasts a massive display area for its size, ideal for smaller retail spaces. Suitable for all applications including meat.

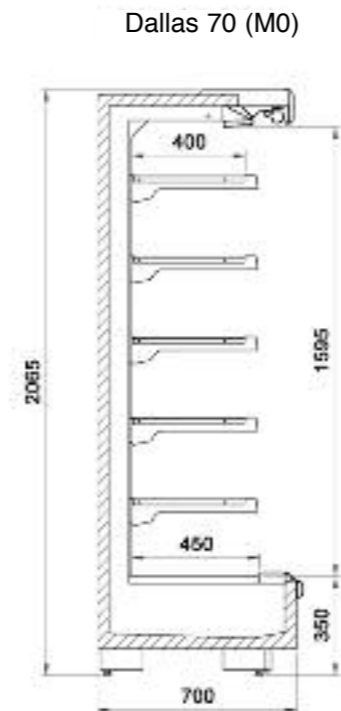

## Excellent value for money

Dallas combines reliability with refrigeration performance, utilizing a high performance evaporator, low energy lighting and optional low energy fans. The result is a value-for-money package matched by few products in its class - low capital cost and exceptionally low running costs.

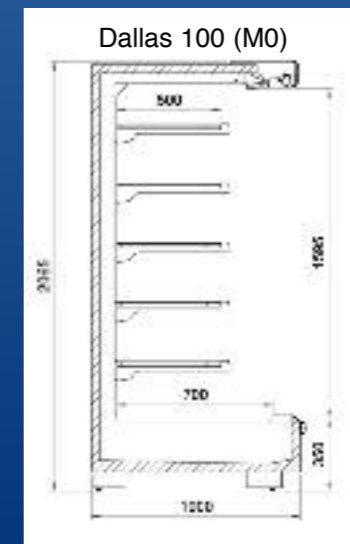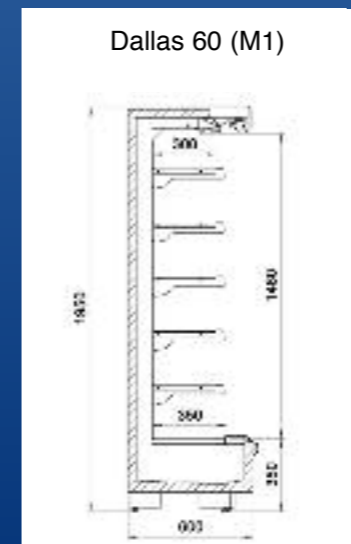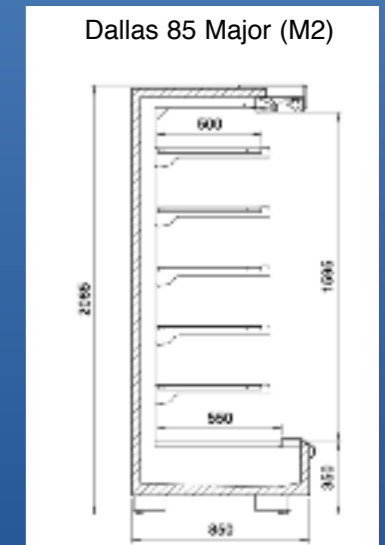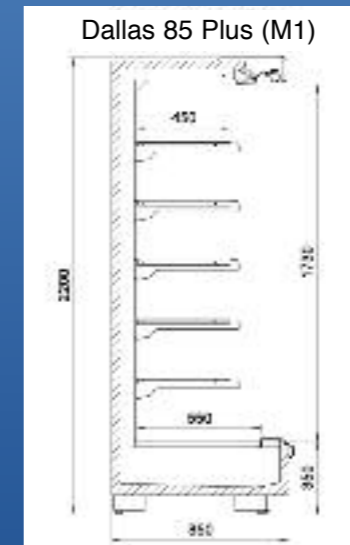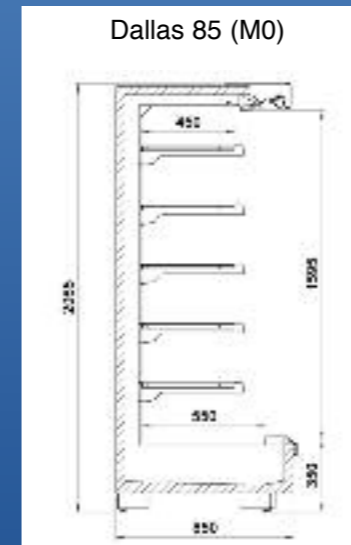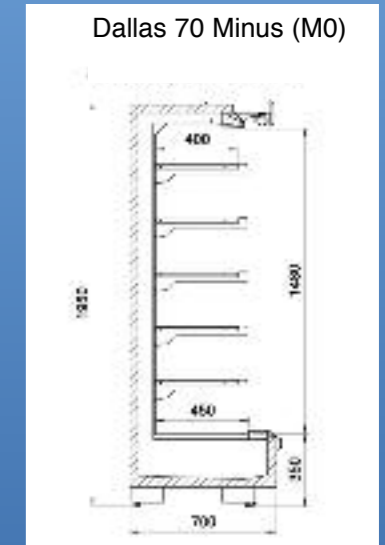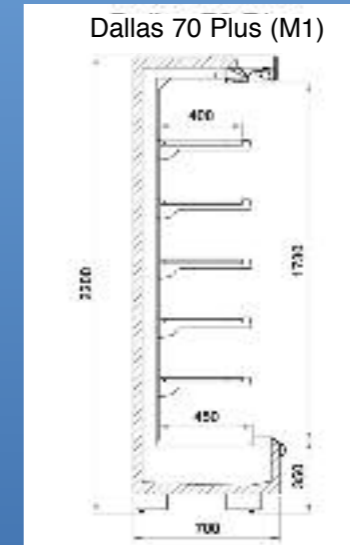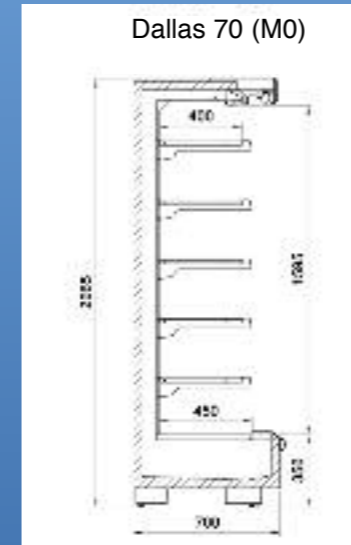

# Dallas

retail environment



Low running costs  
Low energy lighting is a Dallas standard feature.

## Improving the shopping experience

Installation with a remote condensing unit means that the noise of the compressor and the extracted heat of refrigeration are outside the store, enhancing the retail environment

model	length mm	display surface m <sup>2</sup> Dallas 70	display surface m <sup>2</sup> Dallas 85	product temperature M2	product temperature M1	product temperature M0
1.25	1250	3.07	3.51	-1°C to +7°C	-1°C to +5°C	-1°C to +4°C
1.875	1875	4.61	5.26	-1°C to +7°C	-1°C to +5°C	-1°C to +4°C
2.5	2500	6.15	7.02	-1°C to +7°C	-1°C to +5°C	-1°C to +4°C
3.75	3750	9.23	10.53	-1°C to +7°C	-1°C to +5°C	-1°C to +4°C

# Dallas

maximising retail impact



## Product visibility

Styling and design of the Dallas remote display case is simplicity itself. With its low front and deep shelves Dallas puts the emphasis on the products on display, maximising your sales impact despite its narrow profile.

# Dallas 85



Dallas 85 meets Class M0 specification (product at  $-1^{\circ}\text{C}$  to  $+4^{\circ}\text{C}$ ) and is suitable for all products including fresh meat.

With its 850mm profile and standard 450mm shelves Dallas 85 can be set up for dairy, produce, drinks, and meat display.

For M2 applications (product temperatures of  $-1^{\circ}\text{C}$  to  $+7^{\circ}\text{C}$ ) Dallas 85 can be specified with 500mm deep shelves at extra cost.

Dallas 85 (M0)

